

## Fast Idle Speed Control for Dodge Ram Trucks.



### Vehicle Compatibility

This electronic throttle is compatible only with certain Dodge and Serling vehicle configurations. To determine the electronic throttle that matches your vehicle model year, chassis, engine and transmission refer to the Throttle Selector menu of InPower's web site, [www.InPowerLLC.com](http://www.InPowerLLC.com).

### Technical Description

Three fixed speed preset modes allow the engine to be operated in the range of 900 RPM (normal idle) to 2000 RPM. The modes are selected by applying +12 volts to the RPM1, RPM2 or RPM3 mode input terminals. The three fast idle presets can be individually adjusted by calibration potentiometers accessible on the top of the module.

The fast idle function includes chassis ready conditions safeguards that must be satisfied before the engine speed can be increased. These enablers are: transmission in Park, parking brake set, engine started and idling below 1000 RPM, vehicle stationary (no speed), foot off service brake, and foot off accelerator.


A 10 LED diagnostic indicator on top the ETM80 module displays the selected operating mode, status of sensors monitored and other system conditions.

The compact ETM80 controller module measures only 2 x 4 inches. Wiring terminations utilize 0.25 inch Faston (blade) terminals. The controller mounts under the dash and connects to a three foot cable that plugs into the vehicle's OBD-II Data Link Connector.

### Key Features

- Three Adjustable Engine Speed Presets
- Provides Elevated Engine Idle for PTO, A/C and Alternator Loads
- Diagnostic LED Indicators for System and Sensor Status
- Encapsulated electronics for maximum environmental protection
- Compact Size Mounts Under Dash
- Easy to Install

### System Diagram

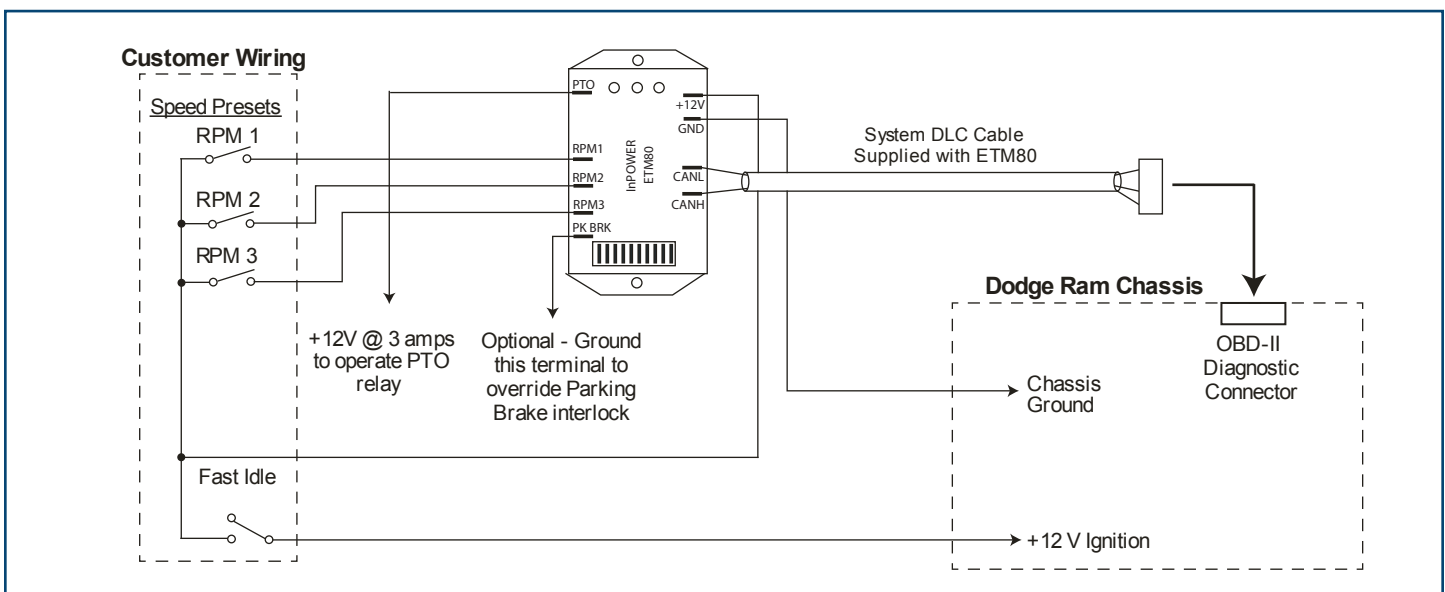

## Specifications

### Modes of Operation

#### Preset RPM Modes

Function:	Increases idle to a preset rpm
Number of presets:	Three
Input identification:	RPM1, RPM2 & RPM3
Activation:	Apply +12 V to input to select mode. Must be from +12 V Ignition power
Range of calibration:	900 to 2000 rpm
Calibration method:	Three internal potentiometers

#### Mode Priorities:

- RPM1 - Highest (will override all other modes)
- RPM2 - Second (will override lower mode)
- RPM3 - Third (Lowest priority)

### Chassis Ready Conditions

The following conditions must be met before the ETM80 controller will initiate a fast idle mode:

1. Engine running at idle speed below 1000 rpm
2. No vehicle speed
3. Automatic transmission in PARK
4. Service brake not depressed
5. Accelerator pedal not depressed
6. Parking brake set (hardwired input from switch)
7. No Diagnostic Trouble Code (DTC) - Check Engine light must be off.

### Power Requirements

Input Voltage:	8 to 16 volts dc (from Ignition Switch)
Input Current:	30 milliamps

### Optional Parking Brake Input

The Park Brake input terminal is not required for normal usage. It may be used for applications that need to increase the engine idle with the parking brake released. Grounding this terminal will allow the ETM80 system to function with the parking brake released.

### PTO Output

The PTO output is set (+12 volts @ 3 amps) to operate a PTO relay. This output turns on after all the chassis ready conditions are met and the engine speed has been increased to 900 rpm. After this output turns on there is a one second delay before the engine speed ramp up begins. This allows the PTO to completely engage at 900 rpm.

NOTE - Do not connect this to the OEM PTO wiring.

## Mechanical Drawing

